



LED LIGHTING



*Creative &
Innovative*

Wide & Exclusive Range Of
QUALITY PRODUCTS

From the House of **OREVA** Group

Effective from: 1st August-2018

POWER SAVER TO THE NATION



When Passion meets Precision, Perfection is born!

The Great Visionary Man, Lt. Shri. Odhavji Bhai R. Patel, laid the foundation of Ajanta Quartz in 1971 and started manufacturing of Wall Clocks under the brand name of "Ajanta" (Ajanta Transistor Clock Mfg. Company) and accomplished several milestones and also became the "World's Largest Clock Manufacturing Company" and later diversified into various verticals such as Lighting Products, Electrical Products, Home Appliances etc.

Ajanta Manufacturing Pvt. Ltd., (Oreva Group), a well-known company, has the strong infrastructure with one of the largest manufacturing plants in India, spread over 200 acres of land (at Samakhiali, Kutch District, Gujarat) with the complete set up of state-of-art in-house manufacturing facility. The company has the motto of "Women Empowerment" with the workforce of more than 5,000 women employees. The company has been considered as the pioneer of manufacturing and marketing of CFLs and became "India's 2nd Ranked Brand" in terms of Sales Volume of CFL Products in the year 2007 (as per the report of AC Nielsen ORG – MARG Pvt. Ltd., dated 4th February 2008) and later diversified into LED Lighting Products and created its own niche in LED Lighting Industry. The company has own many prestigious awards from various government bodies and "Oreva is being regarded as One of the Major Brands in India" with the strong network of more than 55,000 channel partners across the country.

Oreva, the formidable name for Innovation with Quality and it is a well-known fact that Oreva is one of the largest manufacturers for LED Lighting Products in India and has the complete set-up of in-house manufacturing facility to produce wide range of LED Lighting Products such as LED Lamps, Tubelights, Down Lights, Panel Lights, Spot Lights, Flood Lights, Hi-Bay Lights, Street Lights etc. which are available from 0.5 watt to 500 watt.

It is a significant factor to highlight that the company has the largest capacity of manufacturing of LED Flood Lights and LED Street Lights with the complete in-house manufacturing facility to produce the entire set of Flood Lights and Street Lights which include die-cast aluminium body, driver, PCB etc. with the help of its various state-of-art equipment such as latest Aluminium die casting plant and machineries to produce from 100gm to 10kg, Fully automatic & advanced powder coating / spray colour plant, fully automatic sandblasting & chemical cleaning plant, more than 150 moulding machines, LED PCB Aluminium & Copper clad laminated plant, latest plant of component auto mounting, wave soldering & SMT, automatic transformer winding machine, conveyor with different voltage zone for all types of lighting products etc. The plant has the own setup of state-of-art R & D Lab with the installation of various testing equipment to inspect the quality standards of the final products as per the BIS norms as well as global standards.

The company has developed various products so far to meet the necessities of "Mass Consumer Market" in India and the core philosophy of the company is to maximise "Value for Money" by providing "Quality Products at Affordable Price" and it has been instrumental for the success of the company. Subsequently, Oreva Lighting products are widely being preferred for various lighting solutions for home, office, commercial, industrial, indoor and outdoor lighting applications.



LED LAMPS



PREMIUM SERIES - LED LAMP

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
5W PREMIUM	120/-			✓	500lm	47Gm	100 Units	620	295	245	8.60Kg
7W PREMIUM	125/-			✓	700lm	81Gm	100 Units	660	325	265	9.10Kg
9W PREMIUM (Compact)	145/-			✓	900lm	81Gm	100 Units	660	325	265	9.10Kg
12W PREMIUM	245/-			✓	1200lm	102Gm	60 Units	465	380	300	7.40Kg
15W PREMIUM	305/-			✓	1500lm	115Gm	60 Units	520	415	315	8.70Kg
20W PREMIUM	395/-			✓	2000lm	126Gm	60 Units	625	515	375	11.98Kg
25W PREMIUM	505/-			✓	2500lm	229Gm	30 Units	500	300	366	9.27Kg
35W PREMIUM	870/-			✓	3500lm	302Gm	20 Units	580	235	410	9.40Kg
45W PREMIUM	1185/-			✓	4500lm	413Gm	10 Units	680	271	235	6.53Kg
55W PREMIUM	1325/-			✓	5500lm	423Gm	10 Units	680	271	235	6.53Kg

Specifications: ♦ Longest Life ♦ Extra bright LED ♦ Instant Start & Flicker free ♦ IC Base High-tech LED Driver
♦ Aluminium Moulded in Thermo Conductive Plastic ♦ Glare free Light ♦ Environment Friendly ♦ Anti corrosion Aluminum body



REGULAR SERIES - LED LAMP

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
5W REGULAR	110/-			✓	500lm	50Gm	100 Units	580	290	225	8.00Kg
7W REGULAR	115/-			✓	700lm	50Gm	100 Units	580	290	225	8.00Kg
9W REGULAR	130/-			✓	900lm	50Gm	100 Units	580	290	225	8.00Kg

Specifications:

♦ Longest Life ♦ Optimum Power Saving ♦ Extra bright LED ♦ Instant Start & Flicker free ♦ IC Base High-tech LED Driver
♦ Aluminium Moulded in Thermo Conductive Plastic ♦ Glare free Light ♦ Environment Friendly ♦ Anti corrosion Aluminum body



ROCKET SERIES - LED LAMP

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
30W ROCKET LED LAMP	955/-			✓	3000lm	410Gm	10 Units	540	215	235	5.30Kg
40W ROCKET LED LAMP	1,095/-			✓	4000lm	450Gm	10 Units	540	215	250	5.75Kg
50W ROCKET LED LAMP	1,255/-			✓	5000lm	515Gm	10 Units	540	215	275	6.30Kg

Specifications:

♦ Longest Life ♦ Optimum Power Saving ♦ Extra bright LED ♦ Instant Start & Flicker free
♦ IC Base High-tech LED Driver ♦ Glare free Light ♦ Environment Friendly ♦ Anti corrosion Aluminum body



ECO SERIES - LED LAMP

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
0.5W MINI	50/-			✓	22lm	13Gm	200 Units	520	250	360	6.16 Kg
1W MINI	60/-			✓	50lm	13Gm	200 Units	520	250	335	6.16 Kg
3W-ECO	85/-			✓	210lm	28Gm	100 Units	515	255	210	4.84 Kg
4W-ECO	110/-	✓	✓	✓	316lm	50Gm	100 Units	600	288	235	8.74 Kg

Specifications:

♦ Longest Life ♦ Optimum Power Saving ♦ Extra bright LED ♦ Instant Start & Flicker free
♦ IC Base High-tech LED Driver ♦ Glare free Light ♦ Environment Friendly

AUTO ON-OFF



SENSOR SERIES - LED LAMP

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
6W SENSOR	455/-			✓	465lm	77Gm	100 Units	760	370	285	12.64Kg
10W SENSOR	555/-			✓	775lm	115Gm	60 Units	503	410	310	10.35Kg

Specifications: ♦ Sensing based on live body motion ♦ LED light automatically turns ON while live motion detected
♦ Turns off automatically; if no motion is detected for 30 ± 5 seconds ♦ Save power, save money
♦ Super bright Antiglare LED light ♦ Detection Distance: 3 ~ 4 mt. (8 ~ 10 ft.)



EMERGENCY - LED LAMP (Rechargeable)

7W-EMERGENCY LAMP
MRP ₹ 595/-

Charging Time : 4-5 Hours
Emergency Time : Appx. 2 Hours
Dimensions : 71.5 X133.5 mm
Master Carton : 30 Pcs

POWER GONE...OREVA ON...



SOLAR LED WALL LIGHT (With Sensor)

4W-SOLAR LED WALL LIGHT
MRP ₹ 595/-
1 Carton = 50 Pcs

Automatic sensor activates in darkness
Solar charging time: >8hours
Motion angle and distance: 120 c, 3M
Delay time: 30S
Size: 96X124X49 mm




MR SERIES - LED LAMP

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORMR-3W GU10	125/-			✓	225lm	44Gm	100 Units	540	273	163	6.46Kg
ORMR-3W GU5.3	125/-			✓	225lm	42Gm	100 Units	540	273	163	6.46Kg
ORMR-5W GU10	185/-			✓	390lm	55Gm	100 Units	540	273	181	7.70Kg
ORMR-5W GU5.3	185/-			✓	390lm	53Gm	100 Units	540	273	181	7.70Kg
ORMR-7W GU10	275/-			✓	521lm	65Gm	100 Units	540	273	199	8.76Kg
ORMR-7W GU5.3	275/-			✓	521lm	62Gm	100 Units	540	273	199	8.76Kg

LED TUBELIGHT

SENSOR SERIES - LED TUBELIGHT

LED SENSOR TUBELIGHT

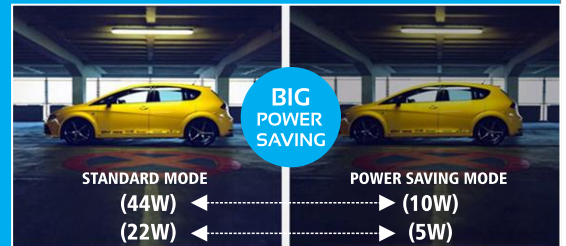

- 22W Motion Sensor Tubelight will turn "ON" automatically finding live motion and will give full light of 22W (Standard Mode).
- If no motion is detected, after 90 Seconds Sensor Tubelight will go in "Power Saving" mode and consume only 5W instead of 22W



MOTION DETECTION



M.NO.	MRP Rs. Per Pc.	COLOUR	STANDARD MODE		POWER SAVING MODE		MASTER CARTON QTY.
			LUMEN	WATTAGE	LUMEN	WATTAGE	
ALISH-22W (4 Feet)	1175/-	6500K	1950lm	22W	520lm	5W	20 Units
SILVER-44W (4 Feet)	2145/-	6500K	3770lm	44W	920lm	10W	10 Units
PLATINUM-44W (4 Feet)	2145/-	6500K	4070lm	44W	1050lm	10W	10 Units

AASHKA SERIES - LED TUBELIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
AASHKA-T8-6W (1Ft)	225/-	✓	✓	✓	600lm	85Gm	30 Units	350	225	210	4.20Kg
AASHKA-T8-11W (2Ft)-Value Pack	380/-	✓	✓	✓	1100lm	157Gm	50 Units	615	220	300	9.20Kg
AASHKA-T8-11W (2Ft)	400/-	✓	✓	✓	1100lm	157Gm	30 Units	640	225	210	7.50Kg
AASHKA-T8-16W (3Ft)	465/-	✓	✓	✓	1600lm	226.5Gm	20 Units	935	183	175	7.60Kg
AASHKA-T8-22W (4Ft)-Value Pack	455/-	✓	✓	✓	2200lm	302.5Gm	30 Units	1200	220	190	10.40Kg
AASHKA-T8-22W (4Ft)	495/-	✓	✓	✓	2200lm	302.5Gm	20 Units	1220	180	180	9.40Kg

ALISH SERIES - LED TUBELIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ALISH-T8-6W (1Ft)	225/-	✓	✓	✓	600lm	113Gm	30 Units	375	235	235	5.20Kg
ALISH-T8-11W (2Ft)-Value Pack	380/-	✓	✓	✓	1100lm	185Gm	50 Units	635	230	355	10.80Kg
ALISH-T8-11W (2Ft)	400/-	✓	✓	✓	1100lm	185Gm	30 Units	660	235	235	8.70Kg
ALISH-T8-16W (3Ft)	465/-	✓	✓	✓	1600lm	254Gm	20 Units	960	191	198	8.40Kg
ALISH-T8-22W (4Ft)-Value Pack	455/-	✓	✓	✓	2200lm	353Gm	30 Units	1225	220	220	11.40Kg
ALISH-T8-22W (4Ft)	495/-	✓	✓	✓	2200lm	353Gm	20 Units	1250	190	200	10.65Kg

AARIEYANA SERIES - LED TUBELIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
AARIEYANA-T8-6W (1Ft)	225/-	✓	✓	✓	600lm	118Gm	30 Units	375	265	230	5.35Kg
AARIEYANA-T8-11W (2Ft)-Value Pack	380/-	✓	✓	✓	1100lm	203.5Gm	50 Units	645	260	360	11.10Kg
AARIEYANA-T8-11W (2Ft)	400/-	✓	✓	✓	1100lm	203.5Gm	30 Units	670	265	230	9.00Kg
AARIEYANA-T8-16W (3Ft)	465/-	✓	✓	✓	1600lm	290.5Gm	20 Units	960	215	195	8.70Kg
AARIEYANA-T8-18W (4Ft) -Value Pack	440/-	✓	✓	✓	1700lm	345Gm	30 Units	1260	215	195	11.50Kg
AARIEYANA-T8-22W (4Ft)-Value Pack	455/-	✓	✓	✓	2200lm	371.5Gm	30 Units	1235	250	220	12.00Kg
AARIEYANA-T8-22W (4Ft)	495/-	✓	✓	✓	2200lm	371.5Gm	20 Units	1260	215	195	11.50Kg

SILVER SERIES - LED TUBELIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
SILVER-10W (1Ft)	395/-	✓	✓	✓	1000lm	140Gm	10 Units	350	250	130	2.30Kg
SILVER-20W (2Ft)	785/-	✓	✓	✓	2000lm	230.5Gm	10 Units	640	250	130	3.90Kg
SILVER-30W (3Ft)	895/-	✓	✓	✓	3000lm	340Gm	10 Units	940	250	130	5.30Kg
SILVER-40W (4Ft)	995/-	✓	✓	✓	4000lm	443.5Gm	10 Units	1230	250	130	7.40Kg

Specifications: ♦ Voltage: 230V AC ± 10% ♦ Frequency: 50Hz ♦ upto 25000 Hours LED life ♦ Longer life span ♦ Sturdy & Safe
 ♦ High efficiency – Energy saving ♦ Superior colour, increased comfort ♦ Improved light levels in work areas
 ♦ Green lighting technology ♦ Lowering air conditioning costs, mercury free, no UV & IR radiation ♦ Maintenance free

PLATINUM SERIES - LED TUBELIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
PLATINUM-20W (2Ft)	785/-	✓	✓	✓	2000lm	258Gm	10 Units	640	250	130	3.95Kg
PLATINUM-40W (4Ft)	995/-	✓	✓	✓	4000lm	485Gm	10 Units	1225	250	130	7.33Kg

Specifications: ♦ Voltage: 230V AC ± 10% ♦ Frequency: 50Hz ♦ upto 25000 Hours LED life ♦ Longer life span ♦ Sturdy & Safe
 ♦ High efficiency – Energy saving ♦ Superior colour, increased comfort ♦ Improved light levels in work areas
 ♦ Green lighting technology ♦ Lowering air conditioning costs, mercury free, no UV & IR radiation ♦ Maintenance free

GOLDEN SERIES - LED TUBELIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
GOLDEN-15W (1Ft)	585/-	✓	✓	✓	1500lm	180Gm	10 Units	350	260	160	2.70Kg
GOLDEN-30W (2Ft)	1,175/-	✓	✓	✓	3000lm	322.5Gm	10 Units	640	260	160	5.00Kg
GOLDEN-45W (3Ft)	1,335/-	✓	✓	✓	4500lm	480Gm	10 Units	940	260	160	7.50Kg
GOLDEN-60W (4Ft)	1,495/-	✓	✓	✓	6000lm	615Gm	10 Units	1230	260	160	9.40Kg

Specifications: ♦ Voltage: 230V AC ± 10% ♦ Frequency: 50Hz ♦ upto 25000 Hours LED life ♦ Longer life span ♦ Sturdy & Safe
 ♦ High efficiency – Energy saving ♦ Superior colour, increased comfort ♦ Improved light levels in work areas
 ♦ Green lighting technology ♦ Lowering air conditioning costs, mercury free, no UV & IR radiation ♦ Maintenance free

LED DOWN LIGHTS / PANEL LIGHTS

SLIM SERIES - PANEL LIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORPL-R4-6W SLIM	305/-	✓	✓	✓	385lm	Ø110	60 Units	470	370	275	15.70Kg
ORPL-SQ4-6W SLIM	305/-	✓	✓	✓	360lm	110X110	60 Units	470	370	275	17.70Kg
ORPL-R4-9W SLIM	355/-	✓	✓	✓	615lm	Ø110	60 Units	470	370	275	15.80Kg
ORPL-SQ4-9W SLIM	355/-	✓	✓	✓	580lm	110X110	60 Units	470	370	275	17.80Kg
ORPL-R6-12W SLIM	575/-	✓	✓	✓	845lm	Ø160	40 Units	420	370	375	14.70Kg
ORPL-SQ6-12W SLIM	575/-	✓	✓	✓	800lm	160X160	40 Units	420	370	375	17.20Kg
ORPL-R6-15W SLIM	625/-	✓	✓	✓	1083lm	Ø160	40 Units	420	370	375	14.70Kg
ORPL-SQ6-15W SLIM	625/-	✓	✓	✓	1041lm	160X160	40 Units	420	370	375	17.20Kg
ORPL-R8-18W SLIM	825/-	✓	✓	✓	1345lm	Ø210	20 Units	525	370	240	13.55Kg
ORPL-SQ8-18W SLIM	825/-	✓	✓	✓	1287lm	210X210	20 Units	525	370	240	16.13Kg
ORPL-R8-21W SLIM	875/-	✓	✓	✓	1570lm	Ø210	20 Units	525	370	240	13.55Kg
ORPL-SQ8-21W SLIM	875/-	✓	✓	✓	1501lm	210X210	20 Units	525	370	240	16.28Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
 ♦ IC Base High-tech LED Driver ♦ Anti Glare Diffuser ♦ No RF Interference

REGULAR SERIES - DOWN LIGHT / PANEL LIGHT



M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORDL-R3-3W / ORDL-SQ3-3W	185/-	✓	✓	✓	175lm	Ø74	50 Units	530	235	250	5.80Kg
ORDL-R4-6W / ORPL-R4-6W	435/-	✓	✓	✓	385lm	Ø98	50 Units	575	235	285	10.20Kg
ORDL-R4-9W / ORPL-R4-9W	515/-	✓	✓	✓	615lm	Ø98	50 Units	575	235	285	10.70Kg
ORDL-R5-12W / ORPL-R5-12W	705/-	✓	✓	✓	847lm	Ø140	30 Units	485	415	180	9.80Kg
ORDL-R6-16W / ORPL-R6-16W	945/-	✓	✓	✓	1155lm	Ø165	30 Units	600	365	205	15.20Kg
ORDL-R7-20W / ORPL-R7-20W	1,105/-	✓	✓	✓	1495lm	Ø180	30 Units	640	405	225	15.00Kg
ORPL-R8-24W	1,545/-	✓	✓	✓	1630lm	Ø210	15 Units	590	300	250	11.20Kg
ORPL-R11-28W	2,095/-	✓	✓	✓	1900lm	Ø288	15 Units	590	270	325	17.30Kg
ORPL-R12-32W	2,595/-	✓	✓	✓	2170lm	Ø300	5 Units	410	210	355	7.20Kg
ORDL-SQ4-6W / ORPL-SQ4-6W	435/-	✓	✓	✓	360lm	110X110	50 Units	690	320	220	14.00Kg
ORDL-SQ4-9W / ORPL-SQ4-9W	515/-	✓	✓	✓	580lm	110X110	50 Units	690	320	220	15.30Kg
ORDL-SQ5-12W / ORPL-SQ5-12W	705/-	✓	✓	✓	800lm	140X140	30 Units	640	365	180	12.20Kg
ORDL-SQ6-16W / ORPL-SQ6-16W	945/-	✓	✓	✓	1110lm	160X160	30 Units	635	410	205	16.70Kg
ORDL-SQ7-20W / ORPL-SQ7-20W	1,105/-	✓	✓	✓	1430lm	182X182	30 Units	670	455	230	17.80Kg
ORPL-SQ8-24W	1,545/-	✓	✓	✓	1630lm	210X210	15 Units	590	310	250	12.90Kg
ORPL-SQ11-28W	2,095/-	✓	✓	✓	1900lm	282X282	15 Units	590	388	325	20.60Kg
ORPL-SQ12-32W	2,595/-	✓	✓	✓	2170lm	300X300	5 Units	410	210	355	8.60Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
♦ IC Base High-tech LED Driver ♦ Heat Dissipating Aluminum Body ♦ Anti Glare Diffuser ♦ No RF Interference

DX SERIES - DOWN LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORDL-R4-10W DX	855/-			✓	1000lm	Ø102	20 Units	630	320	220	8.10Kg
ORDL-R5-15W DX	1,195/-	✓	✓	✓	1500lm	Ø136	20 Units	580	390	260	12.10Kg
ORDL-R6-20W DX	1,345/-	✓	✓	✓	2000lm	Ø158	20 Units	630	440	240	14.60Kg
ORDL-R8-30W DX	2,245/-			✓	2800lm	Ø195	10 Units	670	310	250	9.70Kg
ORDL-SQ4-10W DX	450/-			✓	1000lm	100X100	20 Units	580	300	220	8.10Kg
ORDL-SQ5-15W DX	655/-			✓	1500lm	131X131	20 Units	580	370	260	11.60Kg
ORDL-SQ6-20W DX	740/-			✓	2000lm	164X164	20 Units	600	440	280	15.60Kg
ORDL-SQ8-30W DX	1,225/-			✓	2800lm	199X199	10 Units	580	310	260	10.70Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
♦ IC Base High-tech LED Driver ♦ Heat Dissipating Aluminum Body ♦ Anti Glare Diffuser ♦ No RF Interference

ASTRAL SERIES - DOWN LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORDL-R4-5W COB	260/-	✓	✓	✓	383lm	Ø98	50 Units	630	380	173	12.30Kg
ORDL-R5-12W COB	440/-	✓	✓	✓	1014lm	Ø140	30 Units	510	365	230	11.60Kg
ORDL-R6-15W COB	585/-	✓	✓	✓	1301lm	Ø165	30 Units	600	410	255	15.90Kg
ORDL-R7-18W COB	650/-	✓	✓	✓	1616lm	Ø180	30 Units	610	425	270	16.80Kg
ORDL-SQ4-5W COB	260/-	✓	✓	✓	359lm	110X110	50 Units	700	430	195	16.00Kg
ORDL-SQ5-12W COB	440/-	✓	✓	✓	958lm	140X140	30 Units	510	365	240	13.00Kg
ORDL-SQ6-15W COB	585/-	✓	✓	✓	1258lm	160X160	30 Units	590	410	267	17.70Kg
ORDL-SQ7-18W COB	650/-	✓	✓	✓	1544lm	182X182	30 Units	610	430	282	19.50Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
♦ IC Base High-tech LED Driver ♦ Heat Dissipating Aluminum Body ♦ Anti Glare Diffuser ♦ No RF Interference

CROWN SERIES - DOWN LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
CROWN ORDL-R4-5W	345/-	✓	✓	✓	290lm	Ø90	40 Units	605	255	200	6.30Kg
CROWN ORDL-R5-9W	435/-	✓	✓	✓	525lm	Ø105	40 Units	670	295	280	9.80Kg
CROWN ORDL-SQ4-5W	345/-	✓	✓	✓	290lm	Ø90	40 Units	605	255	200	8.40Kg
CROWN ORDL-SQ5-9W	435/-	✓	✓	✓	525lm	Ø105	40 Units	670	295	280	10.20Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
♦ IC Base High-tech LED Driver ♦ Heat Dissipating Aluminum Body ♦ Anti Glare Diffuser ♦ No RF Interference

MATRIX SERIES - DOWN LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
MATRIX-ORDL-R5-10W	425/-			✓	820lm	Ø144	10 Units	370	250	180	2.60Kg
MATRIX-ORDL-R7-15W	745/-			✓	1230lm	Ø183	10 Units	450	250	220	3.80Kg
MATRIX-ORDL-R8-20W	925/-			✓	1640lm	Ø223	10 Units	530	250	260	5.10Kg
MATRIX-ORDL-SQ5-10W	425/-			✓	820lm	144X144	10 Units	370	250	180	2.90Kg
MATRIX-ORDL-SQ7-15W	745/-	✓	✓	✓	1230lm	184X184	10 Units	450	250	220	4.80Kg
MATRIX-ORDL-SQ8-20W	925/-			✓	1640lm	223X223	10 Units	530	250	260	6.00Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
♦ IC Base High-tech LED Driver ♦ Anti Glare Diffuser ♦ No RF Interference

SURFACE CEILING LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORCL-R-18W	495/-			✓	1425lm	599.5Gm	20 Units	630	290	570	16.20Kg
ORCL-R-24W	735/-			✓	2050lm	809.5Gm	10 Units	710	340	350	15.90Kg
ORCL-RE-18W	495/-			✓	1500lm	645.5Gm	20 Units	670	340	400	11.25Kg
ORCL-SQ-18W	495/-			✓	1550lm	659Gm	20 Units	560	270	520	16.70Kg
ORCL-SQ-24W	735/-			✓	2125lm	1043Gm	10 Units	700	340	330	13.10Kg

Specifications: ♦ Operating Voltage Range: 90V to 300V AC / 50~60 Hz ♦ Input Voltage: 230V AC ♦ High CRI
♦ Operating Temp.: -20° ~ 50° C ♦ Durable and Slim housing ♦ Antiglare diffuser soft light, low glare
♦ High Transitive diffuser

LUNA SERIES - SURFACE CEILING PANEL LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
LUNA ORSPL-R4-9W	625/-	✓	✓	✓	615lm	195Gm	50 Units	650	210	270	14.30Kg
LUNA ORSPL-R5-12W	745/-	✓	✓	✓	845lm	335Gm	30 Units	480	400	170	13.50Kg
LUNA ORSPL-R6-16W	1,025/-	✓	✓	✓	1155lm	440Gm	30 Units	570	410	200	17.20Kg
LUNA ORSPL-R7-20W	1,075/-	✓	✓	✓	1495lm	495Gm	30 Units	610	410	210	19.20Kg
LUNA ORSPL-R12-24W	1,100/-			✓	1630lm	884.5Gm	5 Units	320	230	320	6.30Kg
LUNA ORSPL-R12-32W	1,595/-	✓	✓	✓	2200lm	1200Gm	5 Units	345	230	345	8.40Kg
LUNA ORSPL-R16-32W	1,810/-			✓	2170lm	1680Gm	3 Units	420	150	420	6.60Kg
LUNA ORSPL-R20-40W	2,670/-			✓	2600lm	2599Gm	2 Units	520	100	520	6.60Kg
LUNA ORSPL-R24-48W	3,495/-			✓	3120lm	3774Gm	2 Units	620	100	620	9.15Kg
LUNA ORSPL-SQ4-9W	625/-	✓	✓	✓	580lm	270Gm	50 Units	650	210	270	19.00Kg
LUNA ORSPL-SQ5-12W	745/-	✓	✓	✓	800lm	403Gm	30 Units	480	400	170	15.00Kg
LUNA ORSPL-SQ6-16W	1,025/-	✓	✓	✓	1100lm	495Gm	30 Units	570	410	200	19.20Kg
LUNA ORSPL-SQ7-20W	1,075/-	✓	✓	✓	1430lm	594Gm	30 Units	610	410	210	23.20Kg
LUNA ORSPL-SQ12-24W	1,100/-			✓	1630lm	1121Gm	5 Units	320	230	320	7.40Kg
LUNA ORSPL-SQ12-32W	1,595/-	✓	✓	✓	2100lm	1460Gm	5 Units	345	230	345	9.50Kg
LUNA ORSPL-SQ16-32W	1,810/-			✓	2170lm	2127Gm	3 Units	420	150	420	7.90Kg
LUNA ORSPL-SQ20-40W	2,670/-			✓	2700lm	2800Gm	2 Units	520	100	520	7.90Kg
LUNA ORSPL-SQ24-48W	3,495/-			✓	3240lm	4400Gm	2 Units	620	100	620	10.70Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
♦ IC Base High-tech LED Driver ♦ Heat Dissipating Aluminum Body ♦ Anti Glare Diffuser ♦ No RF Interference

MIRACLE SERIES - SURFACE CEILING DOWN LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
MIRACLE ORSDL-R5-12W COB	775/-	✓	✓	✓	1014lm	350Gm	20 Units	440	330	170	9.30Kg
MIRACLE ORSDL-R6-15W COB	995/-	✓	✓	✓	1301lm	475Gm	10 Units	380	270	200	6.40Kg
MIRACLE ORSDL-R7-18W COB	1,095/-	✓	✓	✓	1616lm	234Gm	10 Units	410	270	220	7.20Kg
MIRACLE ORSDL-SQ5-12W COB	775/-	✓	✓	✓	958lm	432.5Gm	20 Units	440	330	170	10.60Kg
MIRACLE ORSDL-SQ6-15W COB	995/-	✓	✓	✓	1258lm	573Gm	10 Units	380	270	200	7.40Kg
MIRACLE ORSDL-SQ7-18W COB	1,095/-	✓	✓	✓	1544lm	681.5Gm	10 Units	410	270	220	8.50Kg

Specifications: ♦ Rated Voltage: 230V AC / 50Hz ♦ High CRI ♦ Operating Temp.: -20° ~ 50° C ♦ Life Time: 30,000 Hours
♦ IC Base High-tech LED Driver ♦ Heat Dissipating Aluminum Body ♦ Anti Glare Diffuser ♦ No RF Interference

SENSOR SURFACE CEILING LIGHT



M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORSNL-R-18W-S	825/-			✓	1425lm	551.5Gm	20 Units	630	290	570	15.20Kg

Specifications: ♦ Operating Voltage Range: 160V to 250V AC / 50~60 Hz ♦ Sensing based on live body motion
♦ LED light automatically turns ON while Human motion detected during the dark ♦ Super bright Antiglare LED light
♦ Turns off automatically; if no motion is detected within 25 ± 5 seconds

LED SPOT LIGHT

COB SERIES - LED SPOT LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORSL-R1-1W COB	295/-	✓	✓	✓	70lm	Ø38	40 Units	280	225	135	2.70Kg
ORSL-R1-3W COB	335/-	✓	✓	✓	200lm	Ø40	40 Units	280	225	135	2.90Kg
ORSL-SQ1-3W COB	335/-	✓	✓	✓	173lm	Ø40	40 Units	280	225	135	3.00Kg
ORSL-R2-3W COB	385/-	✓	✓	✓	229lm	Ø54	30 Units	385	230	150	10.60Kg
ORSL-R3-5W COB	625/-	✓	✓	✓	373lm	Ø70	20 Units	457	185	165	3.50Kg
ORSL-R4-11W COB	895/-	✓	✓	✓	758lm	Ø90	20 Units	577	235	195	9.60Kg
ORSL-R5-18W COB	1,545/-	✓	✓	✓	1238lm	Ø116	10 Units	475	295	155	4.90Kg
ORSL-SQ/R3-10W COB (5W X 2)	1,205/-	✓	✓	✓	840lm	152X71	10 Units	380	240	190	8.90Kg
ORSL-R6-30W COB	2,725/-	✓	✓	✓	2700lm	Ø145	10 Units	640	365	195	9.00Kg

REGULAR SERIES - LED SPOT LIGHT



Round & Square

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	CUT OUT SIZE(MM)	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORSL-R3-3W	120/-	✓	✓	✓	240lm	Ø78	80 Units	460	370	290	15.70Kg
ORSL-R4-5W	200/-	✓	✓	✓	395lm	Ø96	40 Units	570	230	280	13.50Kg
ORSL-R4-7W	215/-	✓	✓	✓	540lm	Ø96	40 Units	570	230	280	13.60Kg
ORSL-SQ3-3W	120/-	✓	✓	✓	240lm	Ø78	80 Units	590	390	290	19.10Kg
ORSL-SQ4-5W	200/-	✓	✓	✓	395lm	Ø96	40 Units	700	260	250	16.10Kg
ORSL-SQ4-7W	215/-	✓	✓	✓	540lm	Ø96	40 Units	700	260	250	16.50Kg

LED HI-BAY LIGHTS



M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORHB-40W HI-BAY	3235/-	✓		✓	4000lm	1400Gm	10 Units	640	250	250	15.350Kg
ORHB-50W HI-BAY	3335/-	✓		✓	5000lm	1400Gm	10 Units	640	250	250	15.380Kg
ORHB-60W HI-BAY	3435/-	✓		✓	6000lm	1400Gm	10 Units	640	250	250	15.480Kg
ORHB-75W HI-BAY	5,455/-	✓		✓	7500lm	2650Gm	4 Units	525	285	290	11.60Kg
ORHB-100W HI-BAY	6,945/-	✓		✓	10000lm	2700Gm	4 Units	525	285	290	11.80Kg
ORHB-125W HI-BAY	7,155/-	✓		✓	12500lm	2720Gm	4 Units	525	285	290	11.90Kg
ORHB-150W HI-BAY	8,955/-	✓		✓	15000lm	3840Gm	1 Unit	330	330	140	4.00Kg
ORHB-200W HI-BAY	11,555/-	✓		✓	20000lm	3920Gm	1 Unit	330	330	140	4.20Kg
ORHB-250W HI-BAY	12,995/-	✓		✓	25000lm	4000Gm	1 Unit	330	330	140	4.30Kg

COLOUR / RGB SERIES - HI-BAY LIGHT

ORHB-100W-HI-BAY-R	7195/-	RED COLOUR			2700Gm	4 Units	525	285	290	11.80Kg
ORHB-100W HI-BAY-G	7195/-	GREEN COLOUR			2700Gm	4 Units	525	285	290	11.80Kg
ORHB-100W HI-BAY-B	7195/-	BLUE COLOUR			2700Gm	4 Units	525	285	290	11.80Kg
ORHB-100W HI-BAY-O	7195/-	ORANGE COLOUR			2700Gm	4 Units	525	285	290	11.80Kg
ORHB-100W-HI-BAY-RGB (With Remote)	7,555/-	16 Various Colour Tones with 4 Main Colours			2700Gm	4 Units	525	285	290	11.80Kg






1ST TIME IN INDIA
with various fitting options
WALL / POLE & CEILING

- DIE-CASTED ALUMINUM BODY
- IP65**
- SHORT CURCUIT PROOF
- OVER VOLTAGE PROTECTION
- UNDER VOLTAGE PROTECTION

- APPLICATIONS**
- ♦ Park / Garden ♦ Stadium ♦ Outdoor Function ♦ Factory / Workshop
 - ♦ Ware House ♦ Tunnel area ♦ Community Hall ♦ Malls
 - ♦ Petrol Pumps ♦ Bus Stops ♦ Railway Stations ♦ Airports ♦ Hospitals
 - ♦ All type of campus ♦ Residential Colonies

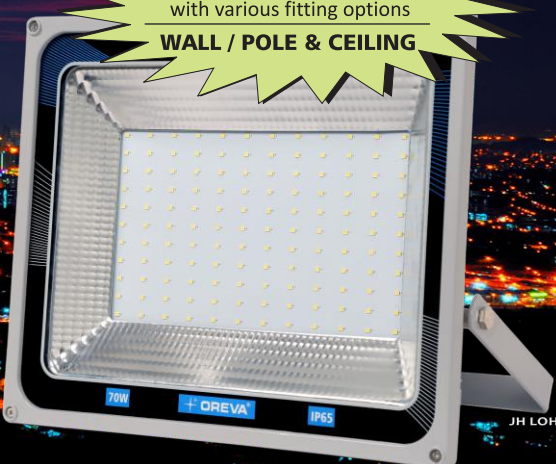

LED FLOOD LIGHTS



REGULAR SERIES - FLOOD LIGHTS

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORFLD-15W	820/-	✓		✓	1200lm	425Gm	20 Units	480	250	170	10.40Kg
ORFLD-20W	1,200/-	✓		✓	1700lm	740Gm	20 Units	530	400	170	17.20Kg
ORFLD-30W	1,610/-	✓		✓	2550lm	1110Gm	10 Units	600	250	220	13.60Kg
ORFLD-50W	2,600/-	✓		✓	4000lm	1690Gm	10 Units	680	320	260	21.20Kg
ORFLD-70W	3,760/-	✓		✓	5600lm	2350Gm	5 Units	370	390	310	14.90Kg
ORFLD-100W	4,750/-	✓		✓	8000lm	2730Gm	5 Units	370	390	310	14.70Kg
ORFLD-125W	5,420/-	✓		✓	10000lm	3000Gm	5 Units	400	390	340	19.10Kg
ORFLD-150W	8,955/-	✓		✓	15000lm	4840Gm	1 Unit	430	330	160	5.70Kg
ORFLD-200W	11,555/-	✓		✓	20000lm	6000Gm	1 Unit	430	330	160	6.10Kg
ORFLD-250W	12,995/-	✓		✓	25000lm	7250Gm	1 Unit	430	330	170	8.00Kg
ORFLD-300W	17,555/-	✓		✓	30000lm	9250Gm	1 Unit	460	400	150	10.30Kg
ORFLD-350W	19,555/-	✓		✓	35000lm	9500Gm	1 Unit	460	400	150	10.50Kg
ORFLD-400W	21,555/-	✓		✓	40000lm	10420Gm	1 Unit	460	395	235	11.69Kg
ORFLD-500W	24,555/-	✓		✓	50000lm	10500Gm	1 Unit	460	395	235	11.69Kg

PREMIUM SERIES - FLOOD LIGHTS

ORFLD-25W PREMIUM	1,200/-	✓		✓	1700lm	790Gm	20 Units	660	420	240	20.60Kg
ORFLD-55W PREMIUM	2,600/-	✓		✓	4000lm	1020Gm	10 Units	660	240	240	13.30Kg
ORFLD-75W PREMIUM	3,760/-	✓		✓	5700lm	1950Gm	5 Units	340	320	300	11.60Kg
ORFLD-110W PREMIUM	4,750/-	✓		✓	8500lm	2100Gm	5 Units	340	320	300	12.20Kg

SLIM SERIES - FLOOD LIGHTS

ORFLD-30W SLIM	1,610/-	✓		✓	3000lm	1026Gm	10 Units	530	250	230	11.20Kg
ORFLD-50W SLIM	2,600/-	✓		✓	5000lm	1720Gm	10 Units	540	310	270	18.80Kg
ORFLD-70W SLIM	3,760/-	✓		✓	7000lm	2700Gm	5 Units	340	370	320	14.40Kg
ORFLD-100W SLIM	4,750/-	✓		✓	10000lm	2750Gm	5 Units	340	370	320	14.45Kg
ORFLD-125W SLIM	5,420/-	✓		✓	12500lm	3200Gm	5 Units	340	400	340	18.10Kg

MOUNTING APPLICATIONS - FLOOD LIGHT / HI-BAY LIGHT

SERIES	MODEL NO.	WALL	POLE	CEILING	HANGING
REGULAR SERIES	ORFLD-15W-20W-30W-50W-70W-100W-125W-300W-350W-400W-500W	YES	YES	NO	NO
REGULAR SERIES	ORFLD-150W-200W-250W	YES	YES	YES	NO
COLOUR/RGB	ORFLD-50W COLOUR, ORFLD-25W-55W-100W RGB	YES	YES	NO	NO
PREMIUM SERIES	ORFLD-25W-55W-75W-110W PREMIUM	YES	YES	NO	NO
SLIM SERIES	ORFLD-30W-50W-70W-100W-125W SLIM	YES	YES	YES	NO
HI BAY LIGHT	ORHB-40W-50W-60W-75W-100W-125W-150W-200W-250W HI BAY	YES	YES	NO	YES
COLOUR/RGB HI BAY LIGHT	ORHB-100W COLOUR, ORHB-100W RGB	YES	YES	NO	YES




RGB FLOOD LIGHT

Features:

- ◆ Operating Voltage range: 120~280V AC
- ◆ Operating Temperature: -10°C to 55°C
- ◆ Clear toughened Glass
- ◆ Diecasted Aluminum body
- ◆ IP65 Water proof protection
- ◆ Ultra-Bright Energy Efficient LEDs
- ◆ 4 main colours & 16 different Colour tones
- ◆ 4 Modes: Flash / Strobe / Fade / Smooth
- ◆ Instant operation of each Colour tone

Application:

- ◆ Worship Places ◆ Festive Occasions ◆ Events & Shows
- ◆ Gardens ◆ Clubs ◆ Display ◆ Decorative Landscapes etc.

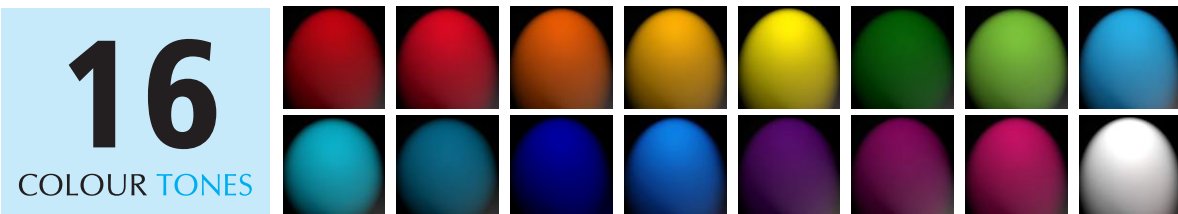

16

COLOUR TONES

COLOUR / RGB SERIES - FLOOD LIGHTS											
M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
ORFLD-50W-R	3,255/-	RED COLOUR			1690Gm	10 Units	680	320	260	21.20Kg	
ORFLD-50W-G	3,255/-	GREEN COLOUR			1690Gm	10 Units	680	320	260	21.20Kg	
ORFLD-50W-B	3,255/-	BLUE COLOUR			1690Gm	10 Units	680	320	260	21.20Kg	
ORFLD-25W RGB (With Remote)	2,325/-	16 Various Colour Tones with 4 Main Colours			1100Gm	10 Units	600	250	220	13.40Kg	
ORFLD-55W RGB (With Remote)	3,675/-				1700Gm	10 Units	680	320	260	20.80Kg	
ORFLD-100W RGB (With Remote)	6,325/-				2700Gm	5 Units	370	390	310	16.20Kg	

- Working Life **50000** Hours
- THD** < 20%
- 12*** YEARS LIFE
- EMC** Compliance
- 4kVA **SURGE** PROTECTION
- OVER VOLTAGE** PROTECTION
- SHORT CURCUIT** PROOF
- UNDER VOLTAGE** PROTECTION

LED STREET LIGHTS

STD SERIES - LED STREET LIGHT

M.NO.	MRP Rs. Per Pc.	COLOUR TEMPERATURE			LUMEN	UNIT WEIGHT	MASTER CARTON QTY.	MASTER CARTON SIZE (MM)			APPX. M. CARTON WEIGHT
		3000K	4200K	6500K				L	W	H	
OLSL-18W STD	1,785/-	✓		✓	1560lm	920Gm	10 Units	335	245	280	11.80Kg
OLSL-24W STD	1,845/-	✓		✓	2040lm	920Gm	10 Units	335	245	280	11.80Kg
OLSL-30W STD	2,115/-	✓		✓	3000lm	920Gm	10 Units	335	245	280	11.80Kg
OLSL-45W STD	2,515/-	✓		✓	4500lm	920Gm	10 Units	335	245	280	11.80Kg
OLSL-55W STD	4,115/-	✓		✓	5500lm	1950Gm	6 Units	475	315	235	14.40Kg
OLSL-70W STD	4,515/-	✓		✓	7000lm	1950Gm	6 Units	475	315	235	14.50Kg
OLSL-90W STD	6,115/-	✓		✓	9000lm	1950Gm	6 Units	475	315	235	14.70Kg

DX SERIES - LED STREET LIGHT

OLSL-15W DX	1,850/-			✓	1500lm	900Gm	10 Units	310	200	310	11.30Kg
OLSL-20W DX	2,500/-			✓	2000lm	900Gm	10 Units	310	200	310	11.50Kg
OLSL-25W DX	2,940/-			✓	2500lm	900Gm	10 Units	310	200	310	11.50Kg
OLSL-31W DX	3,160/-			✓	3100lm	900Gm	10 Units	310	200	310	11.40Kg
OLSL-30W DX	3,550/-			✓	3000lm	1800Gm	6 Units	470	230	230	13.30Kg
OLSL-40W DX	3,880/-			✓	4000lm	1900Gm	6 Units	470	230	230	13.60Kg
OLSL-55W DX	4,090/-			✓	5500lm	2000Gm	6 Units	470	230	230	13.80Kg
OLSL-70W DX	4,420/-			✓	7000lm	1890Gm	6 Units	470	230	230	13.80Kg
OLSL-90W DX	12,870/-			✓	9000lm	6000Gm	1 Unit	720	260	160	7.60Kg
OLSL-110W DX	13,190/-			✓	11000lm	6000Gm	1 Unit	720	260	160	7.50Kg
OLSL-130W DX	14,390/-			✓	13000lm	6000Gm	1 Unit	720	260	160	7.50Kg
OLSL-150W DX	14,610/-			✓	15000lm	6000Gm	1 Unit	720	260	160	7.50Kg

TM SERIES - LED STREET LIGHT

OLSL-25W TM	4,320/-			✓	2550lm	920Gm	10 Units	310	200	310	11.30Kg
OLSL-45W TM	7,075/-			✓	4550lm	1900Gm	6 Units	470	230	230	13.60Kg
OLSL-60W TM	8,750/-			✓	6050lm	2000Gm	6 Units	470	230	230	13.80Kg
OLSL-90W TM	17,200/-			✓	9050lm	6500Gm	1 Unit	720	260	160	7.60Kg
OLSL-120W TM	20,500/-			✓	12100lm	6600Gm	1 Unit	720	260	160	7.60Kg

Specifications: ♦ Rated Voltage AC 90 ~ 300V ♦ Frequency-50Hz ♦ PF > 0.95 ♦ LED : 130 Lm/w ♦ Ra > 72 ♦ THD < 10% ♦ No Flickering ♦ Working Life Up To 50,000 Hrs.
♦ IC Base LED Driver ♦ EMC Compliance ♦ Aluminum Body ♦ Water Proof (IP67) ♦ Short Circuit Proof ♦ Over Voltage Protection ♦ Under Voltage Protection
♦ 4 KVA Surge Protection ♦ Heat Resistant Tuffen Glass ♦ Polyester Powder Coating Colour ♦ Wall & Pole Fitting

